



STACKABLE AC BATTERY

2PACK:6kW/10kWh

3PACK:9kW/15kWh

4PACK:12kW/20kWh

5PACK:15kW/25kWh



Safe & Reliable

- IP67, C4 salt spray resistance
- A+ grade cells with automotive-grade standard
- Smoke detection, active pressure relief

Convenient Installation

- No meter/CT or additional accessories
- No electrical system modifications needed
- Stackable design for 10-25kWh capacity flexibility


Advanced Performance

- Industry-first zero injection without meter/CT
- Three-phase unbalanced output for max. PV utilization
- System-level expert control
- UPS-grade seamless on/off-grid switching

Ultimate Experience

- Automotive-grade BMS for efficient energy management
- Scenario-based app with real-time energy monitoring
- AI-powered cloud with 24/7 alerts and optimization
- Intelligent control for generators and heat pumps

HYX-H6K/9K/12K/15K-HTAC  
Technical Specifications

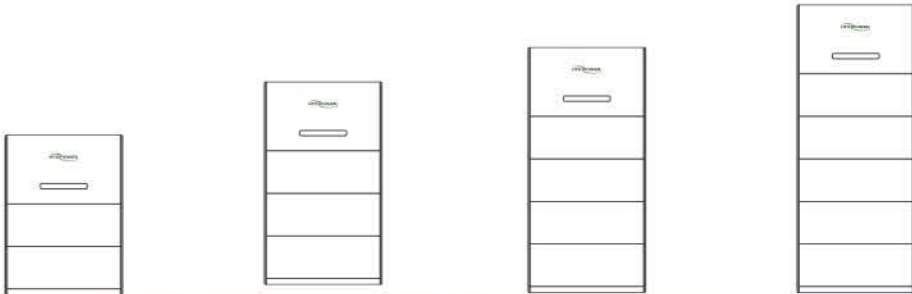

Product Model	HYX-H6K-HTAC	HYX-H9K-HTAC	HYX-H12K-HTAC	HYX-H15K-HTAC
System				
Hybrid Inverter			1	
Battery Module	2	3	4	5
Base			1	
AC Data				
Grid Type		3/N/PE, 220V/380V, 230V/400V, 240V/415V		
Nominal Frequency		50Hz / 60Hz		
Max. Passthrough Current		63A per phase		
Max. Apparent Power Output to Utility	6,600VA	9,900VA	13,200VA	16,500VA
Output Power Factor		0.8 leading ... 0.8 lagging		
THDi		<3%		
Backup				
Max. Continuous Output Power	6,600W	9,900W	13,200W	16,500W
Max Peak Output Power	7,000W, 10s	10,500W, 10s	14,000W, 10s	17,500W, 10s
Switch Time		< 10ms		
Battery				
Battery Type		LiFePO4		
Total Battery Capacity	10.6kWh	15.9kWh	21.2kWh	26.5kWh
Smoke Detection		Integrated		
Pressure Relief Valve		Integrated		
General				
Operating Temperature		-10~50 °C ( Heating version -20~50 °C )		
Cooling Method		Natural Cooling		
Ingress Protection		IP67		
Dimensions (W*H*D)	700*1320*200mm	700*1670*200mm	700*2020*200mm	700*2370*200mm
Weight	152kg	202kg	252kg	302kg
Max. Operating Altitude		4,000m		
User Interface		LED / App / Web		
Communication		CAN / RS485 / WIFI / 4G / LAN / PLC		
Noise Emmision		<30 dB		
DC/AC Surge Arrester		AC/DC II/II		

